

Internal/External CAT5E Unscreened Twisted Pair (U/UTP) Cable – LSZH-UV RATED-DCA




FEATURES

- 25 YEAR SYSTEM WARRANTY
- INDEPENDENT CERTIFICATION
- 305 TO 0 METRE MARKED
- SUPPORTS GIGABIT ETHERNET
- CATEGORY 5E COMPLIANT
- CPR -DCA, S2,d2,a1

PRODUCT OVERVIEW

CNET Category 5e UTP Cables are manufactured, tested and verified to the ISO/IEC 11801 2nd Edition, EN 50173:2007 and ANSI/TIA-568-C.2 standards for enhanced performance Category 5e cables.

Each cable consists of 8 colour coded polyethylene insulated conductors. These are twisted together to form 4 pairs with varying lay lengths. These pairs, together with a strong nylon rip cord are jacketed in a Low Smoke, Zero Halogen, UV material. The printing detail on the sheath, includes the cables part number, specification details and a unique 305-0 metre marking within each box supplied, allowing for quick and easy measurement of cable installed and the amount remaining within the box.

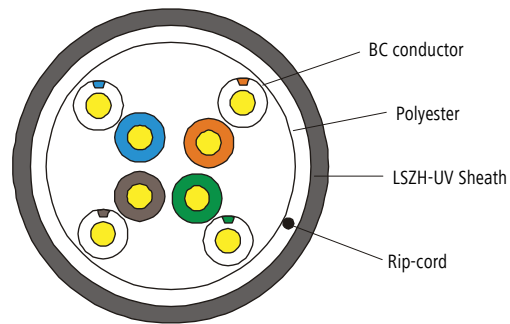

SPECIFICATION

LSZH UV	–
Nominal Overall Diameter	5mm
Operation Temperature Range	-30°C to +50°C
Bend Radius	4 x overall diameter installed, 8x installing
Conductor	24AWG Solid Copper
Conductor Insulation	HDPE
Material	LSZH (Complies with RoHs) UV Resistant
NVP	69%
Carton Dimension	380 x 380 x 200mm
Weight	9KGS

PERFORMANCE OVERVIEW

CNET Category 5e cables are manufactured and tested to the Category 5 enhanced standards as defined by the EIA/TIA and ISO standards' bodies. Swept frequency tests are applied to each critical performance characteristic, such as near end cross talk (NEXT and far end cross talk (FEXT. Both Worst Case and Power Sum Test methods are applied. Actual performance exceeds the required standard by a considerable margin ensuring sufficient headroom for even the most demanding applications.

TECHNICAL PERFORMANCE (100M)

FREQUENCY (MHz)	RL \geq dB	ATT(20°C) \leq dB	NEXT \geq dB	PHASE DELAY \leq ns	PSNEXT \geq dB	ELFEXT \geq dB	PSELFEXT \geq dB
1	20.0	2.0	65.3	570.00	62.3	63.8	60.8
4.0	23.0	4.1	56.3	552.00	53.3	51.8	48.8
8.0	24.5	5.8	51.8	546.73	48.8	45.7	42.7
10.0	25.0	6.5	50.3	545.38	47.3	43.8	40.8
16.0	25.0	8.2	47.2	543.00	44.4	39.7	36.7
20.0	25.0	9.3	45.8	542.05	42.8	37.8	34.8
25.0	24.3	10.4	44.3	541.20	41.3	35.8	32.8
31.25	23.6	11.7	42.9	540.44	39.9	33.9	30.9
62.5	21.5	17.0	38.4	538.55	35.4	27.9	24.9
100	20.1	22.0	35.3	537.60	32.3	23.8	20.8

TYPICAL APPLICATIONS

- 10Base-T Ethernet
- 155 Mbps ATM
- 100BASETX Fast Ethernet
- 622 Mbps ATM
- 1000BASET Gigabit Ethernet
- Token Ring

PART NUMBER INFORMATION

PART NO.	DESCRIPTION
QUCAT5EUV-INT-EXT	Category 5e Unscreened (U/UTP) Cable, LSZH-UV DCA CPR BLACK JACKET, 305m Box

SYSTEM WARRANTY

The CNET Cabling System Warranty provides a 25 year product and applications assurance of compliance with the industry performance standard appropriate to the class of cabling installed.

The warranty may be applied for by a registered approved CNET (AI) Associated Installer who has designed, supplied and installed the relevant system.

