











Interface




The GENESIS-5s-DM5-IVD-B is a multi-format 5MP WDR dome camera that is IP67 weatherproof, this camera has a motorised 2.7~13.5 Lens. For night vision this camera uses SIRUS / STARLIGHT technology allowing the camera to operate in colour in low lux conditions at up to 30m range.

The GENESIS-5s-DM5-IVD-B at default supports HDCVI video format but with the integrated DIP switch on the cable the camera format can be changed to HD-TVI, AHD and CVBS.

The latest HDCVI standard allows for extremely long transmission distances without any loss of quality. It supports distances of up to 700m (5MP) via coaxial cable and up to 300m via UTP cable using Baluns.

The camera can also transmit audio from a microphone via the built in audio input.

This camera is dual 24vAC / 12vDC making the camera highly versatile.

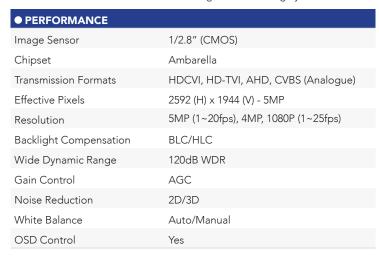

• LENS	
Focal Length	2.7~13.5mm Motorised, Fixed Iris
Max Aperture	F1.3
Mount Type	Board-In
Angle of View	H: 102° ~ 29°
Angle of view	H: 102° ~ 29°

• DORI GUIDE (EN 62676-4)	
Detect	25px/m = Wide = 64m / Tele = 222m
Observe	63px/m = Wide = 26m / Tele = 89m
Recognize	125px/m = Wide = 13m / Tele = 44m
Identify	250px/m = Wide = 6m / Tele = 22m

● DAY & NIGHT	
Min. Illumination	0.005Lux @ F1.6, 30IRE 0Lux (IR On)
Day/Night	Auto (ICR)/Manual
IR Distance	Up to 30m SIRUS / STARLIGHT / Smart IR





● CONNECTIVITY	
Video Output	1 (BNC)
CVBS Analogue Output	 (can be switched to CVBS on master output)
Alarm Input	-
Alarm Output	_
Audio Input	1 - Audio Input Interface
Audio Output	_
RS-485	_
Memory Slot	-

● ENVIRONMENTAL	
Power	24vAC / 12vDC (±30%)
Consumption	14.1W (Max, 12vDC, IR On)
Working Environment	-30°C ~ +60°C / Less than 90% RH
IP Protection	IP67
Vandal Protection	IK10
Construction Material	Aluminium
Dimensions	Ø122(mm) x 88.9(mm)
Weight	0.48kg (NET) / 0.65kg (Gross)

ACCESSORIES (OPTIONAL)	
Junction Base	BASE-137-B
Pole Mount	BASE-137-B + MNT-PM152-E (White)
Wall Mount	MNT-203-W (White)
Baluns and PSU	Please ask us for complete range

