

# Request to Exit Button Range




Request to Exit Button

## Technical specifications


- Contacts : Double pole NONC.
- Output : 4 AMP contact @ 30V ACDC.
- Wear resistant legend.
- Security screws (Allen key type).
- Internal or External use.

Approval : EN 50133 Industrial Codes of Practice

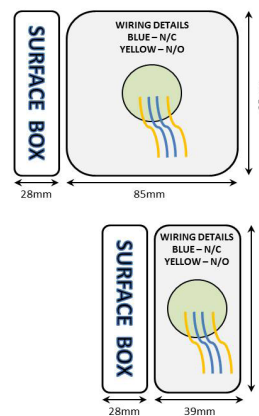

|               |               |                              |               |                               |
|---------------|---------------|------------------------------|---------------|-------------------------------|
| EBGBWOC02/PTE | 85x85x28 (mm) | Standard green dome button   | PRESS TO EXIT | 246g (Boxed) / 198g (Unboxed) |
| EBGBWOC02/DR  | 85x85x28 (mm) | Standard green dome button   | DOOR RELEASE  | 246g (Boxed) / 198g (Unboxed) |
| EBGB/AP/PTE   | 85x39x28 (mm) | Architrave green dome button | PRESS TO EXIT | 128g (Boxed) / 106g (Unboxed) |
| EBGB/AP/DR    | 85x39x28 (mm) | Architrave green dome button | DOOR RELEASE  | 128g (Boxed) / 106g (Unboxed) |

Other items in the RGL range.

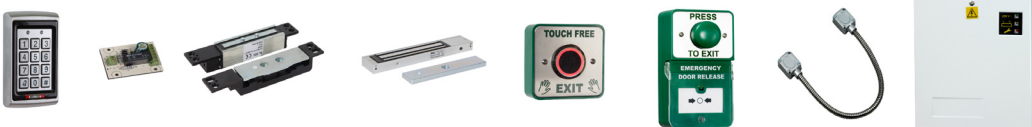

## FEATURES

- All plastic large green button.
- Momentary operation.
- High impact plastic back box.
- Can be surface or flush fitting.
- Easy clean surface. Ideal for general/sensitive areas.
- Screw footprint for flush fitting onto standard back box.

