

Request to Exit EDR Range



Reset Key




Emergency Door Release

Technical specifications

- Single pole (EDR-1)
- Double pole (EDR-2)
- Triple pole (EDR-3)
- Includes audible/LED (selectable)
- 12/24V Operation.
- Includes plastic front covers which flip up for operation.
- Operating temperature: -10 ° C to 55 ° C


Approval : EN 50133 Industrial Codes of Practice



Triple Pole Board

EDR-1	88x88x52 (mm)	Single Pole Call Point	212g (Boxed) / 148g (Unboxed)
EDR-2	88x88x52 (mm)	Double Pole Call Point	212g (Boxed) / 148g (Unboxed)
EDR-3	88x88x52 (mm)	Triple Pole Call Point	212g (Boxed) / 148g (Unboxed)

Other items in the RGL range.

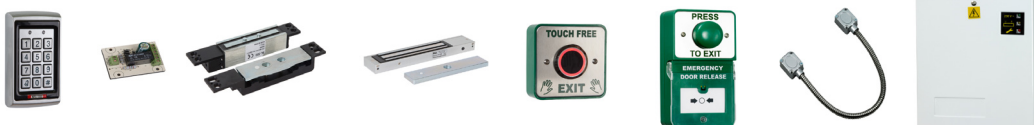

FEATURES

- All one colour.
- Easy clean surface (ideal for hospitals/public areas)
- Easy cable entry from sides or rear.
- Screw footprint for surface fitting onto standard back box.
- Key reset operation (not replacement glass).
- Internal use.

